


ROTARY CODED SWITCH
SV3A-4 SERIES

10x10mm
Selector Rotary Type

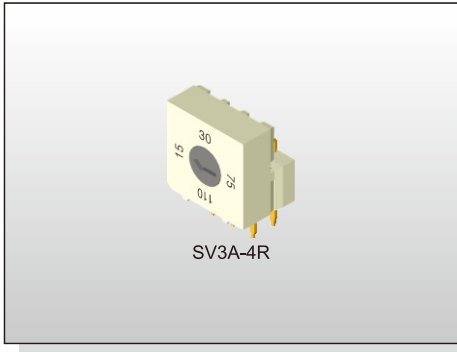

FEATURES

- ※ Through hole pin type
- ※ Flush Actuator
- ※ 20,000 steps mechanical Life


APPLICATION

- ※ Building & home automation
- ※ White goods
- ※ Electronic instrument

SPECIFICATION

| | |
|-----------------------|--------------------|
| Contact Rating | 25mA, 24V DC |
| Contact Resistance | 100mΩ max. |
| Insulation Resistance | 100MΩ min. 250V DC |
| Dielectric Strength | 250V AC/1 minute |
| Operating Force | 200gf·cm max. |
| Operating Life | 20,000 steps |
| Operating Temp. | -25°C ~ +80°C |
| Storage Temp. | -40°C ~ +85°C |

HOW TO ORDER



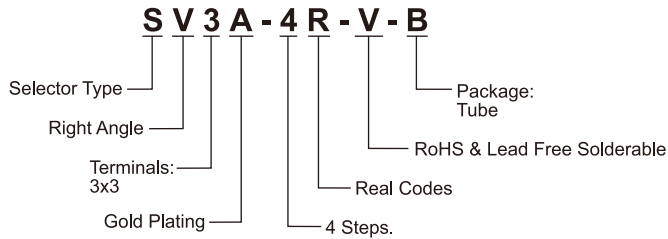


PACKAGE

<Tube>
48 pcs


ROTARY CODED SWITCH

SV3A-4

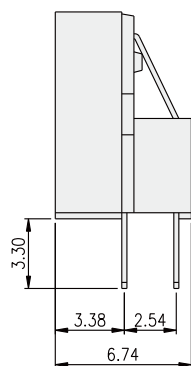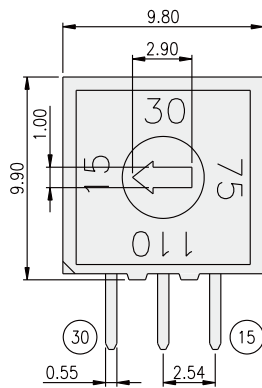

| | | | | | |
|----------|---|------|----|----|-----|
| | | CODE | | | |
| POSITION | | 15 | 30 | 75 | 110 |
| 15 | ○ | ● | ● | ● | ● |
| 30 | ● | ○ | ● | ● | ● |
| 75 | ● | ● | ○ | ● | ● |
| 110 | ● | ● | ● | ○ | ● |

○ ON
● OFF



P.C.B. LAYOUT