

ELU

FEATURES

- ※ Compact sized
- ※ Sharp detection feeling


APPLICATION

- ※ Consumer electronics
- ※ Safety control device
- ※ Heat energy regulator


SPECIFICATION

Contact Rating	100 μ A, 3V DC min. 1mA, 5V DC max.
Contact Resistance	3 Ω max.
Insulation Resistance	100M Ω min. 100V DC
Dielectric Strength	100V AC/1 minute
Operating Force	35gf max.
Travel	2.18mm
Operating Life	50,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

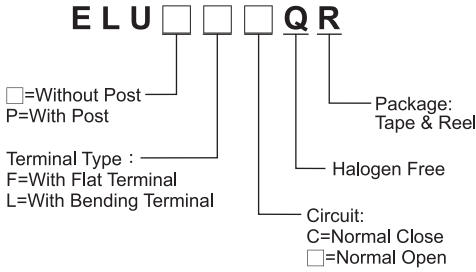

CIRCUIT

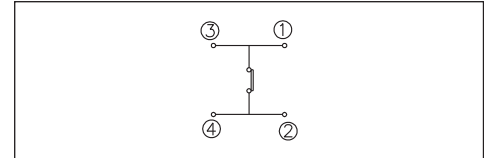

PACKAGE

<Tape & Reel>
2000 pcs

DETECTOR SWITCH

ELU

